

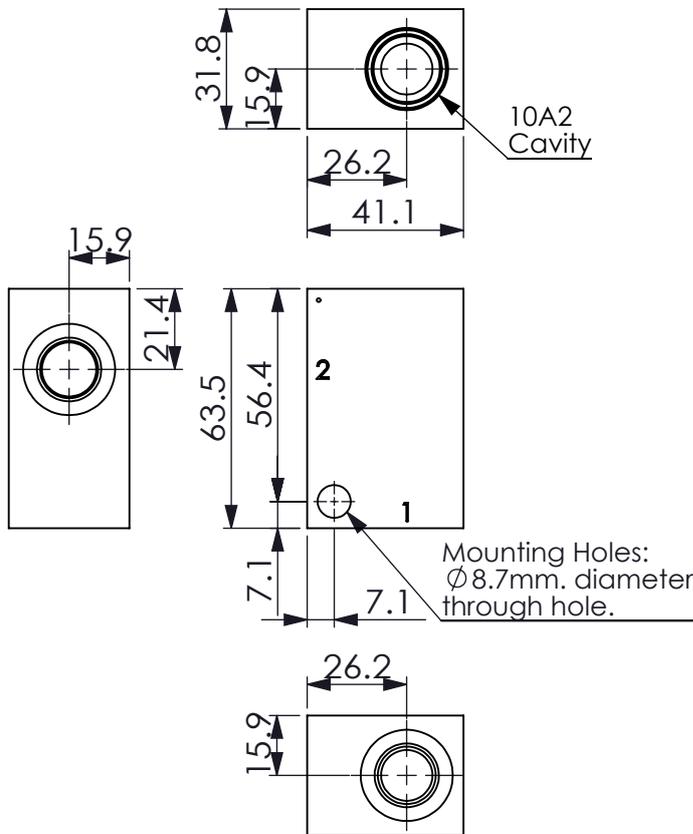


Ordering Code: **ML-10A2-X-Y 01-Z**

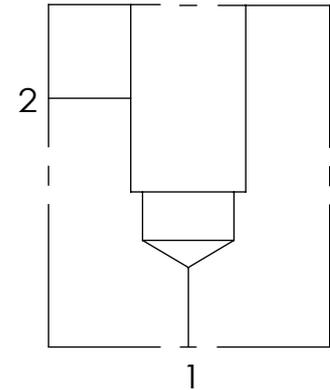

UNIT:mm



### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Cavity:

Refer to 10A2

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.2 kg(WITHOUT VALVES)
Steel	0.5 kg(WITHOUT VALVES)

\* If you need the special specification.  
 Please contact us.

X	PORT SIZE		
	PORT	PORT	
	1	2	
<b>G02</b>	G 1/4"	G 1/4"	
<b>G03</b>	G 3/8"	G 3/8"	
<b>P03</b>	3/8"PT	3/8"PT	
<b>S06</b>	SAE 6	SAE 6	
<b>S08</b>	SAE 8	SAE 8	

Y	BODY MATERIAL	
<b>A</b>	HIGH-STRENGTH ALUMINUM	
<b>T</b>	STEEL (black oxide)	

Z	CARTRIDGE VALVES SELECTION	
	WITHOUT VALVE	
<b>RPOA</b>	RP10A20AL(95 LPM,7~210 bar)	
<b>RD5A</b>	RD10A25AL(95 LPM,35~210 bar)	

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow ` pressure ` ... etc.)