




ENGINEERING YOUR SUCCESS.

Pump & Motor Division Europe  
Parker Hannifin Mfg. Germany GmbH & Co. KG  
Neefestrasse 96  
09116 Chemnitz, Germany  
Ph: +49 (0)371 393 70  
www.parker.com/PMDE


## Pump & Motor Division Europe PVPlus

PV028R1D1T1NMRC



*Interactive 3D graphic, click to activate and rotate  
(3D capable PDF viewer required)*

Technical Data	
Part No.	PV028R1D1T1NMRC
Series	Series PVplus – Design Series 47
Displacement	028 - 28 [cm <sup>3</sup> /rev] maximum, Frame Size 1
Rotation	R - Clockwise
Variation	1 - Standard
Mounting Interface / Shaft	D - SAE 4bolt-mount; SAE keyed shaft
Ports / Threads	1 - BSPP ports; Metric Threads
Thru-drive pad and coupling	T1 - Single Pump prepared for thru drive, no coupling
Seals	N - NBR seals / FKM shaftseal
Controls Group	Hydromechanical Controls
Compensation Part 1	M - hydromechanical controls
Compensation Part 2	R - Pressure compensator with remote adapter mounted
Compensation Part 3	C - Standard with integrated pmax. Pilot
Weight [kg]	19

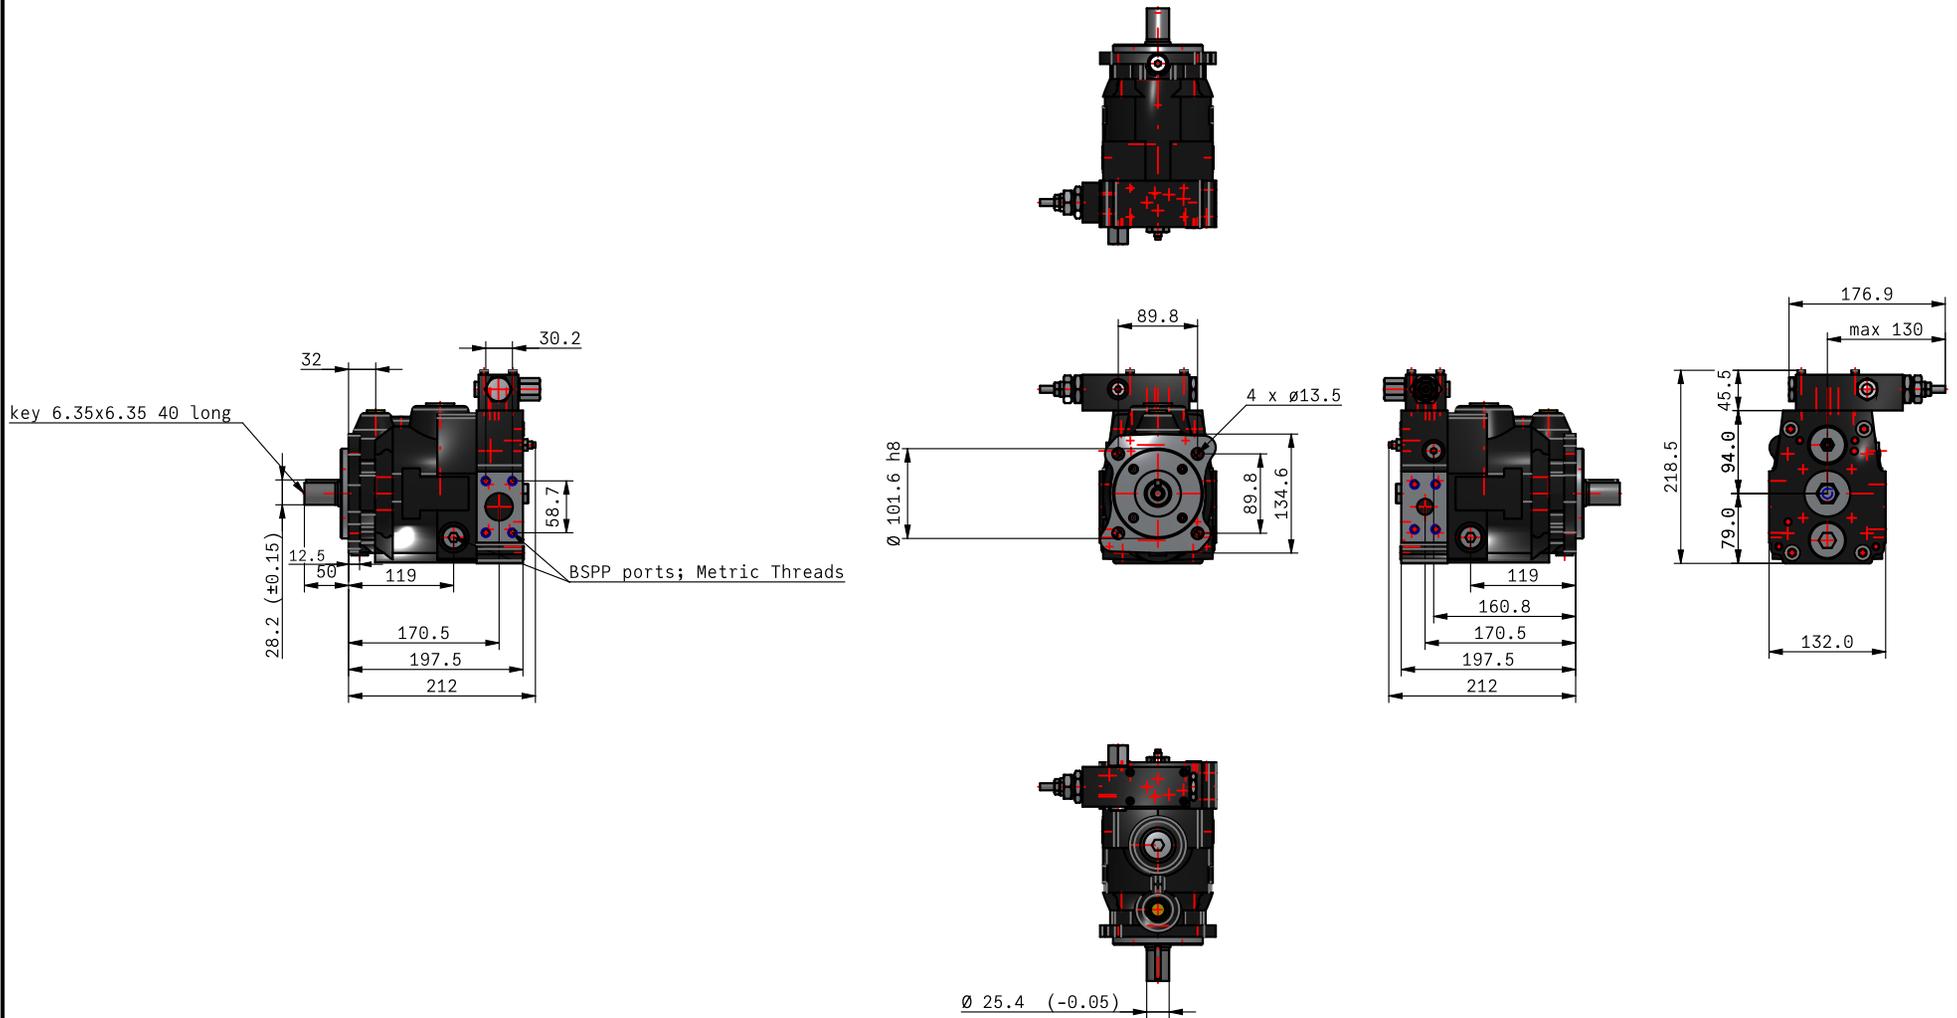

For performance data, dimensions and deviations from standards, see catalog.

**Disclaimer:**

Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PV028R1D1T1NMRC



Price: contact Parker