




ENGINEERING YOUR SUCCESS.

Hydraulic Pump & Motor Division Europe
Parker Hannifin Mfg. Sweden AB
Flygmotorvägen 2
461 38 Trollhättan, Sverige
Ph: +46520 40 46 00
www.parker.com/MSGE


Pump & Motor Division Europe PVPlus

PV028L1D1T1NMRC



*Interactive 3D graphic, click to activate and rotate
(3D capable PDF viewer required)*

Technical Data	
Part No.	PV028L1D1T1NMRC
Series	Series PVplus – Design Series 47
Displacement	028 - 28 [cm ³ /rev] maximum, Frame Size 1
Rotation	L - Counter Clockwise
Variation	1 - Standard
Mounting Interface / Shaft	D - SAE 4bolt-mount; SAE keyed shaft
Ports / Threads	1 - BSPP ports; Metric Threads
Thrudrive pad and coupling	T1 - Single Pump prepared for thru drive, no coupling
Seals	N - NBR seals / FKM shaftseal
Controls Group	Hydromechanical Controls
Compensation Part 1	M - hydromechanical controls
Compensation Part 2	R - Pressure compensator with remote adapter mounted
Compensation Part 3	C - Standard with integrated pmax. Pilot
Weight [kg]	19

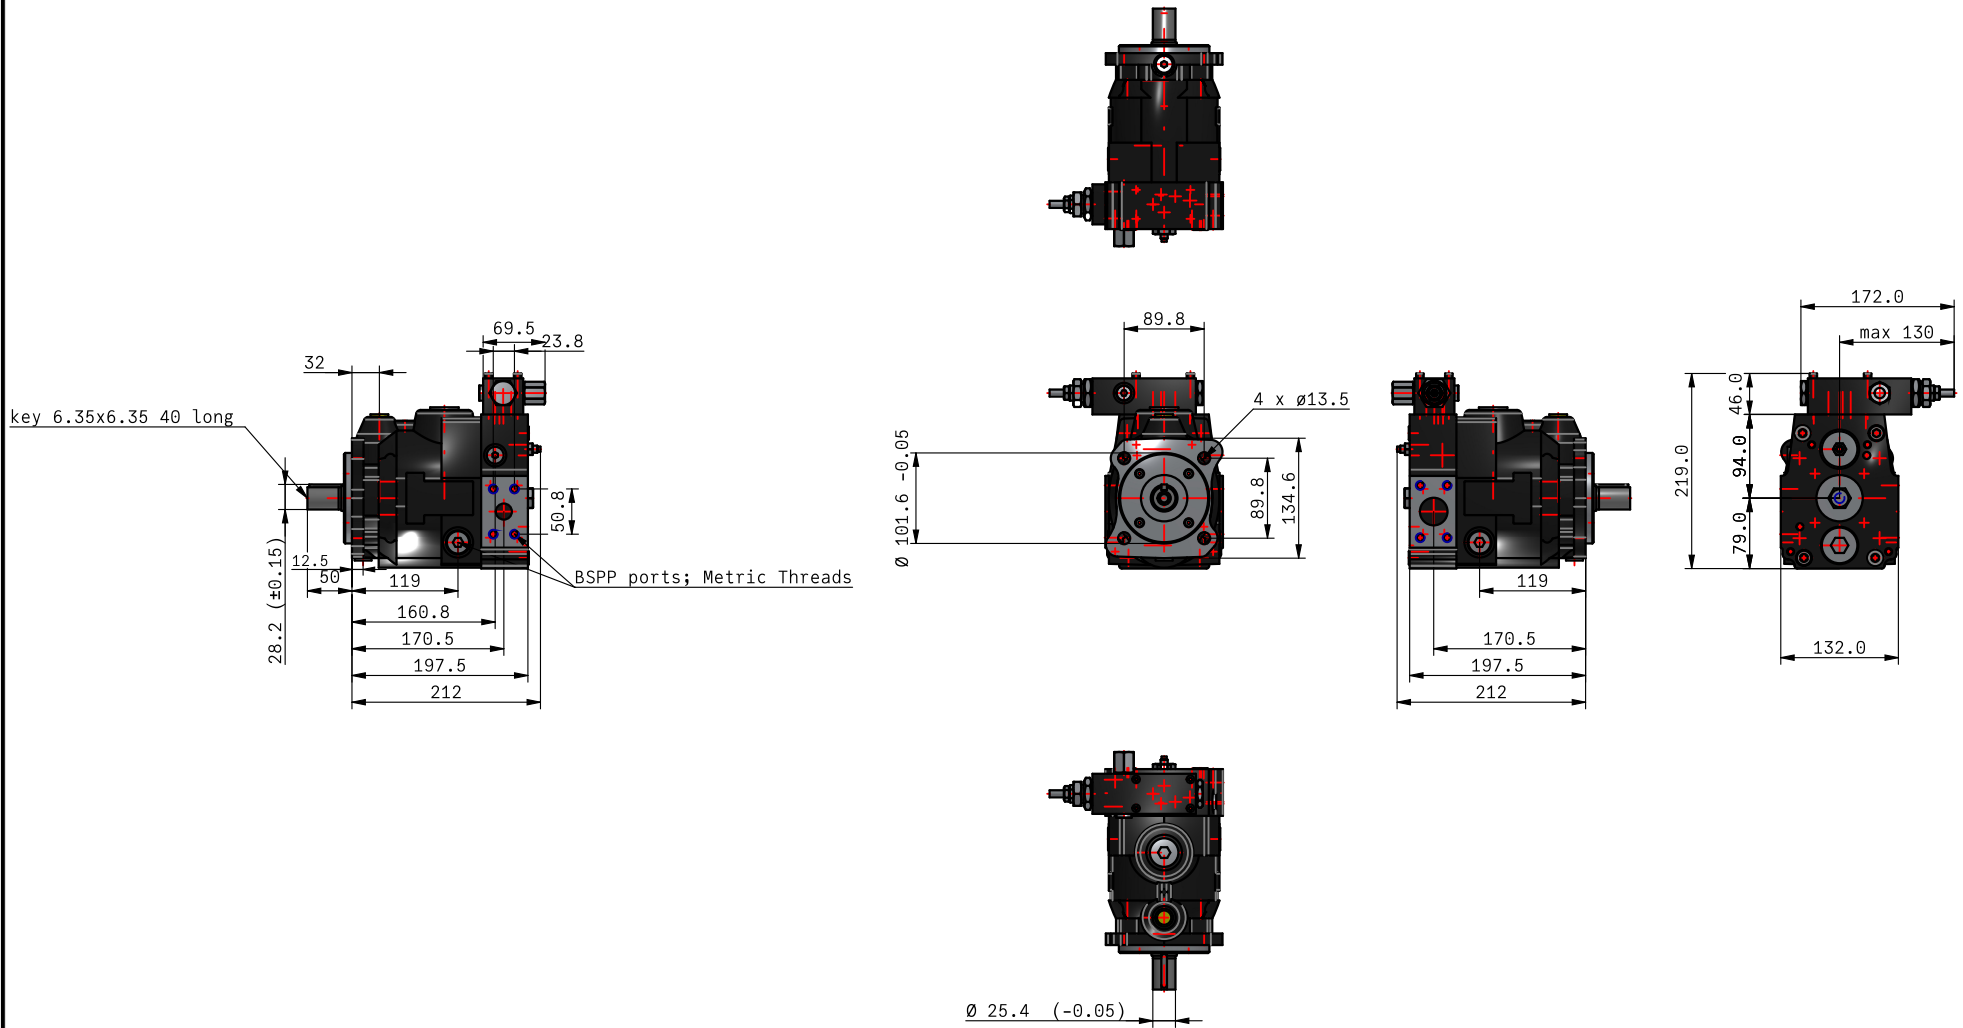

For performance data, dimensions and deviations from standards, see catalog.

Disclaimer:

Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PV028L1D1T1NMRC



Price: contact Parker