




ENGINEERING YOUR SUCCESS.

Pump & Motor Division Europe
Parker Hannifin Mfg. Germany GmbH & Co. KG
Neefestrasse 96
09116 Chemnitz, Germany
Ph: +49 (0)371 393 70
www.parker.com/PMDE


Pump & Motor Division Europe PVPlus

PV360R1K1T1NZLC

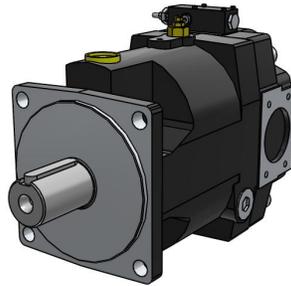

*Interactive 3D graphic, click to activate and rotate
(3D capable PDF viewer required)*

Technical Data	
Part No.	PV360R1K1T1NZLC
Series	Series PVplus – Design Series 47
Displacement	360 - 360 [cm3/rev] maximum, Frame Size 6
Rotation	R - Clockwise
Variation	1 - Standard
Mounting Interface / Shaft	K - metric 4bolt-mount; metric keyed shaft
Ports / Threads	1 - BSPP ports; Metric Threads
Thrudrive pad and coupling	T1 - Single Pump prepared for thru drive, no coupling
Seals	N - NBR seals / FKM shaftseal
Controls Group	Hydromechanical controls with torquelimiter override
Compensation Part 1	Z - 90kW@1500rpm-setting starting PV140
Compensation Part 2	L - Horsepower with pressure compensator
Compensation Part 3	C - Standard with integrated pmax. Pilot
Weight [kg]	180

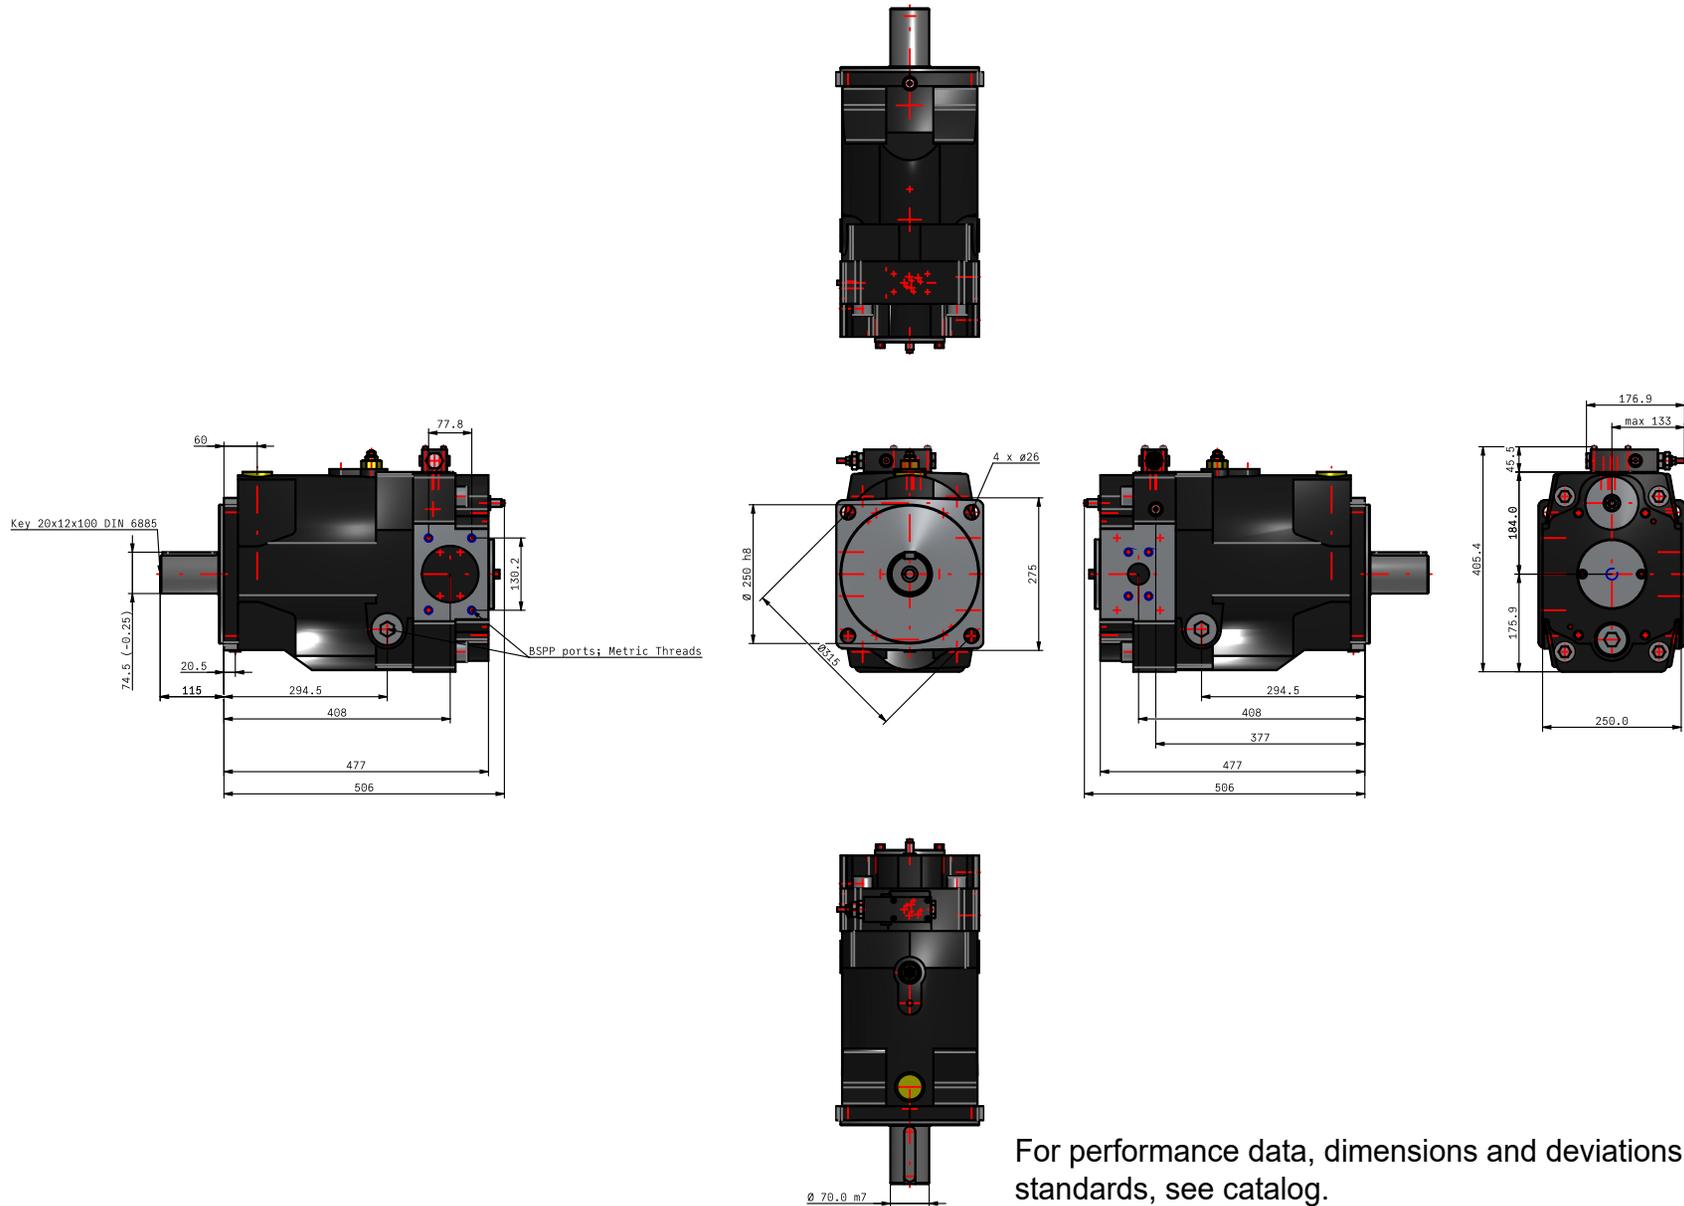

For performance data, dimensions and deviations from standards, see catalog.

Disclaimer:

Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a product's suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PV360R1K1T1NZLC



Price: contact Parker